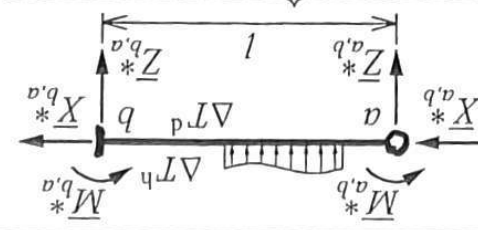
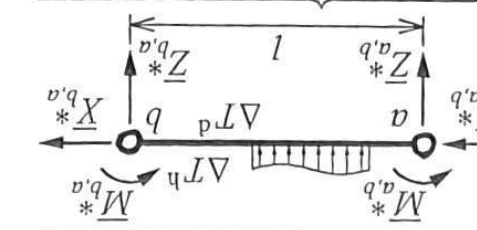
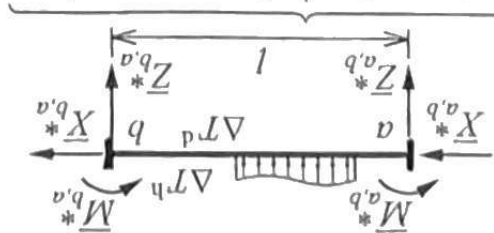


Tabulka 8.1 Primární lokální vektory koncových sil prutu $\{R_{a,b}^*\}$ (pokračování) - úprava Vlk 2012

(c)  Obdélník, průřez: $\Delta T_0 = (\Delta T^d + \Delta T^h)/2$; $\Delta T_1 = \Delta T^d - \Delta T^h$		(8.1c/1)	(8.1c/2)	(8.1c/3)	(8.1c/4)	(8.1c/5)	(8.1c/6)	(8.1c/7)	(8.1c/8)	(8.1c/9)	(8.1c/10)
(d)  Obdélník, průřez: $\Delta T_0 = (\Delta T^d + \Delta T^h)/2$; $\Delta T_1 = \Delta T^d - \Delta T^h$		(8.1d/1)	(8.1d/2)	(8.1d/3)	(8.1d/4)	(8.1d/5)	(8.1d/6)	(8.1d/7)	(8.1d/8)	(8.1d/9)	(8.1d/10)
$\begin{Bmatrix} X_{a,b}^* \\ Z_{a,b}^* \\ M_{a,b}^* \\ X_{b,a}^* \\ Z_{b,a}^* \\ M_{b,a}^* \end{Bmatrix}$		$\begin{Bmatrix} -\frac{b}{l}F_x \\ -\frac{b}{l}F_z \\ 0 \\ -\frac{a}{l}F_x \\ -\frac{a}{l}F_z \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} \frac{1}{2}F_x \\ \frac{1}{2}F_z \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ \frac{M}{l} \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ \frac{M}{l} \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ \frac{M_1 + M_2}{l} \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} \frac{1}{2}nl \\ \frac{1}{2}ql \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} \frac{2al - a^2}{2l}n \\ \frac{2al - a^2}{2l}q \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} -\frac{1}{8}nl \\ -\frac{1}{8}ql \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} -\frac{2n_a + n_b}{6}l \\ -\frac{2q_a + q_b}{6}l \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} EA\alpha_T\Delta T_0 \\ 0 \\ 0 \\ -EA\alpha_T\Delta T_0 \\ 0 \\ 0 \end{Bmatrix}$
$\begin{Bmatrix} X_{a,b}^* \\ Z_{a,b}^* \\ M_{a,b}^* \\ X_{b,a}^* \\ Z_{b,a}^* \\ M_{b,a}^* \end{Bmatrix}$		$\begin{Bmatrix} -\frac{b}{l}F_x \\ -\frac{b}{l}F_z \\ 0 \\ -\frac{a}{l}F_x \\ -\frac{a}{l}F_z \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} \frac{1}{2}F_x \\ \frac{1}{2}F_z \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ \frac{M}{l} \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ \frac{M}{l} \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ \frac{M_1 + M_2}{l} \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} \frac{1}{2}nl \\ \frac{1}{2}ql \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} \frac{2al - a^2}{2l}n \\ \frac{2al - a^2}{2l}q \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} -\frac{1}{8}nl \\ -\frac{1}{8}ql \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} -\frac{2n_a + n_b}{6}l \\ -\frac{2q_a + q_b}{6}l \\ 0 \end{Bmatrix}$	$\begin{Bmatrix} EA\alpha_T\Delta T_0 \\ 0 \\ 0 \\ -EA\alpha_T\Delta T_0 \\ 0 \\ 0 \end{Bmatrix}$

Tabulka 8.1 Primární lokální vektory koncových sil prutu $\{R_{a,b}^*\}$


u prava U/L 2018

(a)		(8.1a/1)	(8.1a/2)	(8.1a/3)	(8.1a/4)	(8.1a/5)	(8.1a/6)	(8.1a/7)	(8.1a/8)	(8.1a/9)	(8.1a/10)
	$X_{a,b}^*$	F_x	F_x	M	M	M_1	q	q	q	q_a	$EA\alpha_T\Delta T_0$
	$Z_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{b,a}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
(b)	$M_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{a,b}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{b,a}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
(b)	$Z_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{a,b}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
(b)	$X_{b,a}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{a,b}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
(b)	$M_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{b,a}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{a,b}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
(b)	$Z_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{a,b}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$
	$X_{b,a}^*$	F_x	F_x	F_x	F_x	M_1	q	q	q	q_a	$-EA\alpha_T\Delta T_0$
	$Z_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	0
	$M_{b,a}^*$	F_z	F_z	F_z	F_z	M_2	q	q	q	q_b	$EI \frac{a_T \Delta T_1}{h}$

Obdélník, průřez:
 $\Delta T_0 = (\Delta T^a + \Delta T^b)/2$;
 $\Delta T_1 = \Delta T^a - \Delta T^b$


Obdélník, průřez:
 $\Delta T_0 = (\Delta T^a + \Delta T^b)/2$;
 $\Delta T_1 = \Delta T^a - \Delta T^b$

(a) Prut oboustranně monoliticky připojený

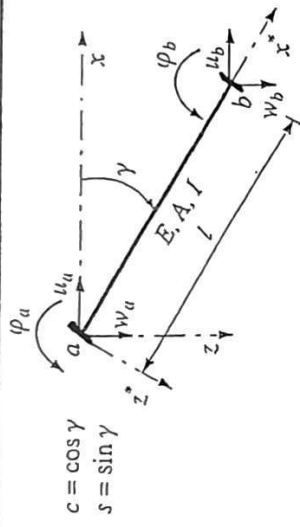


$$k_{ab} = \begin{bmatrix} \frac{EA}{l}c^2 + \frac{12EI}{l^3}s^2 & \left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{6EI}{l^2}s & -\left(\frac{EA}{l}c^2 + \frac{12EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{6EI}{l^2}s \\ \left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{12EI}{l^3}c^2 & -\frac{6EI}{l^2}c & -\left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{12EI}{l^3}c^2 & -\frac{6EI}{l^2}c \\ \frac{6EI}{l^2}s & -\frac{6EI}{l^2}c & \frac{4EI}{l} & -\frac{6EI}{l^2}s & \frac{6EI}{l^2}c & \frac{2EI}{l} \\ -\left(\frac{EA}{l}c^2 + \frac{12EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{6EI}{l^2}s & \frac{EA}{l}c^2 + \frac{12EI}{l^3}s^2 & -\left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{6EI}{l^2}s \\ -\left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{12EI}{l^3}c^2 & -\frac{6EI}{l^2}c & \left(\frac{EA}{l} - \frac{12EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{12EI}{l^3}c^2 & -\frac{6EI}{l^2}c \\ \frac{6EI}{l^2}s & -\frac{6EI}{l^2}c & \frac{2EI}{l} & -\frac{6EI}{l^2}s & \frac{6EI}{l^2}c & \frac{4EI}{l} \end{bmatrix}$$

(b) Prut pravostranně kloubově připojený

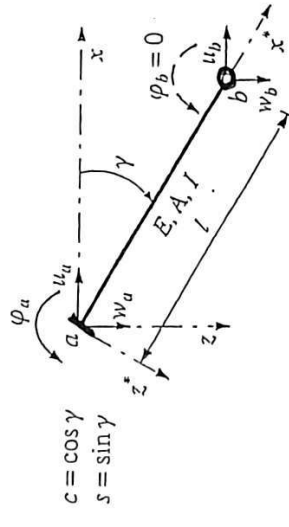


$$k_{ab} = \begin{bmatrix} \frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2 & \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{3EI}{l^2}s & -\left(\frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 \\ \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & -\frac{3EI}{l^2}c & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & 0 \\ \frac{3EI}{l^2}s & -\frac{3EI}{l^2}c & \frac{3EI}{l} & -\frac{3EI}{l^2}s & \frac{3EI}{l^2}c & 0 \\ -\left(\frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{3EI}{l} & \frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2 & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 \\ -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & -\frac{3EI}{l^2}c & \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & 0 \\ -\left(\frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{3EI}{l} & \frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2 & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 \end{bmatrix}$$

(c) Prut levostranně kloubově připojený

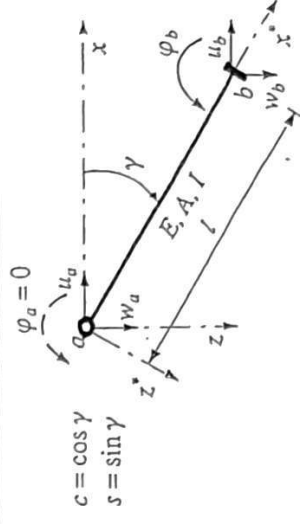

$$k_{ab} = \begin{bmatrix} \frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2 & \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 & -\left(\frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 \\ \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & 0 & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ -\left(\frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2\right) & -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 & \frac{EA}{l}c^2 + \frac{3EI}{l^3}s^2 & \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & 0 \\ -\left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & 0 & \left(\frac{EA}{l} - \frac{3EI}{l^3}\right)cs & \frac{EA}{l}s^2 + \frac{3EI}{l^3}c^2 & 0 \\ 0 & 0 & 0 & -\frac{3EI}{l^2}c & \frac{3EI}{l^2}s & \frac{3EI}{l} \end{bmatrix}$$

(d) Prut oboustranně kloubově připojený




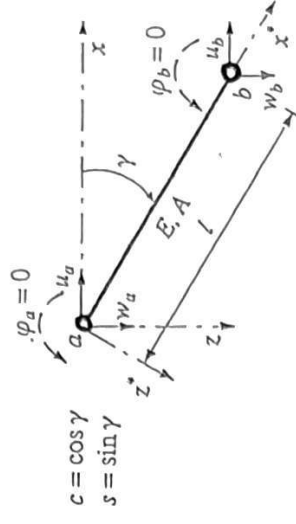


$$k_{ab} = \frac{EA}{l} \begin{bmatrix} c^2 & cs & 0 & -c^2 & -cs & 0 \\ cs & s^2 & 0 & -cs & -s^2 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ -c^2 & -cs & 0 & c^2 & cs & 0 \\ -cs & -s^2 & 0 & cs & s^2 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$$

K výpočtu lokálních koncových sil z globálních parametrů deformace:

$$\vec{R}_{ab} = k_{ab} \vec{r}_{ab} = \frac{EA}{l} \begin{bmatrix} c & s & 0 & -c & -s & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ -c & -s & 0 & c & s & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} \vec{r}_{ab}$$

Tabulka 8.3 Lokální matice tuhosti prutu $[k_{a,b}^*]$

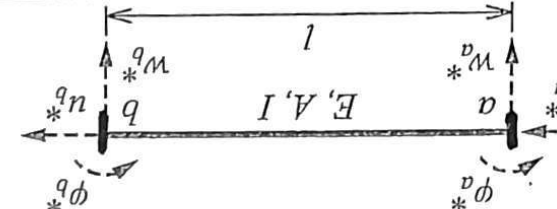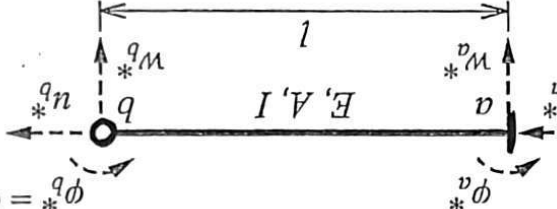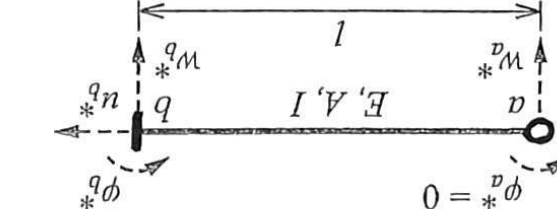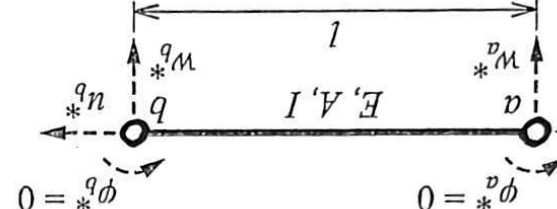 (8.3a) $[k_{a,b}^*] = \begin{bmatrix} u_a & w_a & \varphi_a \\ \vdots & \vdots & \vdots \\ u_b & w_b & \varphi_b \end{bmatrix} = \begin{bmatrix} \frac{EA}{l} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{12EI}{l^3} & \frac{6EI}{l^2} & 0 & 0 & 0 \\ 0 & \frac{6EI}{l^2} & \frac{4EI}{l} & 0 & 0 & 0 \\ \hline -\frac{EA}{l} & 0 & 0 & \frac{EA}{l} & 0 & 0 \\ 0 & \frac{12EI}{l^3} & \frac{6EI}{l^2} & 0 & \frac{12EI}{l^3} & \frac{6EI}{l^2} \\ 0 & \frac{6EI}{l^2} & \frac{2EI}{l} & 0 & \frac{6EI}{l^2} & \frac{4EI}{l} \end{bmatrix}$ $\begin{matrix} \text{---} \\ a & b \end{matrix}$	 (8.3b) $[k_{a,b}^*] = \begin{bmatrix} u_a & w_a & \varphi_a \\ \vdots & \vdots & \vdots \\ u_b & w_b & \varphi_b \end{bmatrix} = \begin{bmatrix} \frac{EA}{l} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{3EI}{l^3} & \frac{3EI}{l^2} & 0 & 0 & 0 \\ 0 & \frac{3EI}{l^2} & \frac{3EI}{l} & 0 & 0 & 0 \\ \hline -\frac{EA}{l} & 0 & 0 & \frac{EA}{l} & 0 & 0 \\ 0 & \frac{3EI}{l^3} & \frac{3EI}{l^2} & 0 & \frac{3EI}{l^3} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$ $\begin{matrix} \text{---} \\ a & b \end{matrix}$
 (8.3c) $[k_{a,b}^*] = \begin{bmatrix} u_a & w_a & \varphi_a \\ \vdots & \vdots & \vdots \\ u_b & w_b & \varphi_b \end{bmatrix} = \begin{bmatrix} \frac{EA}{l} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{3EI}{l^3} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ \hline -\frac{EA}{l} & 0 & 0 & \frac{EA}{l} & 0 & 0 \\ 0 & \frac{3EI}{l^3} & 0 & 0 & \frac{3EI}{l^3} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$ $\begin{matrix} \text{---} \\ a & b \end{matrix}$	 (8.3d) $[k_{a,b}^*] = \begin{bmatrix} u_a & w_a & \varphi_a \\ \vdots & \vdots & \vdots \\ u_b & w_b & \varphi_b \end{bmatrix} = \begin{bmatrix} \frac{EA}{l} & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ \hline -\frac{EA}{l} & 0 & 0 & \frac{EA}{l} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$ $\begin{matrix} \text{---} \\ a & b \end{matrix}$

Transformace vektorů

z lokálních do globálních souřadnic

$$\left\{\overline{\mathbf{R}}_{a,b}^*\right\} \rightarrow \left\{\overline{\mathbf{R}}_{a,b}\right\}$$

$$\left\{\overline{\mathbf{R}}_{a,b}\right\} = \left\{\begin{array}{c} \overline{X}_a^* \cos \gamma - \overline{Z}_a^* \sin \gamma \\ \overline{X}_a^* \sin \gamma + \overline{Z}_a^* \cos \gamma \\ \overline{M}_a^* \\ \hline \overline{X}_b^* \cos \gamma - \overline{Z}_b^* \sin \gamma \\ \overline{X}_b^* \sin \gamma + \overline{Z}_b^* \cos \gamma \\ \overline{M}_b^* \end{array}\right\}$$

z globálních do lokálních souřadnic

$$\left\{\mathbf{r}_{a,b}\right\} \rightarrow \left\{\mathbf{r}_{a,b}^*\right\}$$

$$\left\{\mathbf{r}_{a,b}^*\right\} = \left\{\begin{array}{c} u_a \cos \gamma + w_a \sin \gamma \\ -u_a \sin \gamma + w_a \cos \gamma \\ \varphi_a \\ \hline u_b \cos \gamma + w_b \sin \gamma \\ -u_b \sin \gamma + w_b \cos \gamma \\ \varphi_b \end{array}\right\}$$

Násobení matice a vektoru

$$\begin{bmatrix} A1 & A2 & A3 & A4 & A5 & A6 \\ B1 & B2 & B3 & B4 & B5 & B6 \\ C1 & C2 & C3 & C4 & C5 & C6 \\ D1 & D2 & D3 & D4 & D5 & D6 \\ E1 & E2 & E3 & E4 & E5 & E6 \\ F1 & F2 & F3 & F4 & F5 & F6 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} A1 \cdot x_1 + A2 \cdot x_2 + A3 \cdot x_3 + A4 \cdot x_4 + A5 \cdot x_5 + A6 \cdot x_6 \\ B1 \cdot x_1 + B2 \cdot x_2 + B3 \cdot x_3 + B4 \cdot x_4 + B5 \cdot x_5 + B6 \cdot x_6 \\ C1 \cdot x_1 + C2 \cdot x_2 + C3 \cdot x_3 + C4 \cdot x_4 + C5 \cdot x_5 + C6 \cdot x_6 \\ D1 \cdot x_1 + D2 \cdot x_2 + D3 \cdot x_3 + D4 \cdot x_4 + D5 \cdot x_5 + D6 \cdot x_6 \\ E1 \cdot x_1 + E2 \cdot x_2 + E3 \cdot x_3 + E4 \cdot x_4 + E5 \cdot x_5 + E6 \cdot x_6 \\ F1 \cdot x_1 + F2 \cdot x_2 + F3 \cdot x_3 + F4 \cdot x_4 + F5 \cdot x_5 + F6 \cdot x_6 \end{Bmatrix} = \begin{Bmatrix} \alpha \\ \beta \\ \gamma \\ \delta \\ \epsilon \\ \zeta \end{Bmatrix}$$

$$\begin{bmatrix} A1 & A2 & A3 & A4 & A5 & A6 \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} A1 \cdot x_1 + A2 \cdot x_2 + A3 \cdot x_3 + A4 \cdot x_4 + A5 \cdot x_5 + A6 \cdot x_6 \\ \\ \\ \\ \\ \end{Bmatrix} = \begin{Bmatrix} \alpha \\ \\ \\ \\ \\ \end{Bmatrix}$$

$$\begin{bmatrix} B1 & B2 & B3 & B4 & B5 & B6 \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} B1 \cdot x_1 + B2 \cdot x_2 + B3 \cdot x_3 + B4 \cdot x_4 + B5 \cdot x_5 + B6 \cdot x_6 \\ \\ \\ \\ \\ \end{Bmatrix} = \begin{Bmatrix} \beta \\ \\ \\ \\ \\ \end{Bmatrix}$$

$$\begin{bmatrix} C1 & C2 & C3 & C4 & C5 & C6 \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} C1 \cdot x_1 + C2 \cdot x_2 + C3 \cdot x_3 + C4 \cdot x_4 + C5 \cdot x_5 + C6 \cdot x_6 \\ \\ \\ \\ \\ \end{Bmatrix} = \begin{Bmatrix} \gamma \\ \\ \\ \\ \\ \end{Bmatrix}$$

$$\begin{bmatrix} D1 & D2 & D3 & D4 & D5 & D6 \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} D1 \cdot x_1 + D2 \cdot x_2 + D3 \cdot x_3 + D4 \cdot x_4 + D5 \cdot x_5 + D6 \cdot x_6 \\ \\ \\ \\ \\ \end{Bmatrix} = \begin{Bmatrix} \delta \\ \\ \\ \\ \\ \end{Bmatrix}$$

$$\begin{bmatrix} E1 & E2 & E3 & E4 & E5 & E6 \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} E1 \cdot x_1 + E2 \cdot x_2 + E3 \cdot x_3 + E4 \cdot x_4 + E5 \cdot x_5 + E6 \cdot x_6 \\ \\ \\ \\ \\ \end{Bmatrix} = \begin{Bmatrix} \epsilon \\ \\ \\ \\ \\ \end{Bmatrix}$$

$$\begin{bmatrix} F1 & F2 & F3 & F4 & F5 & F6 \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{Bmatrix} = \begin{Bmatrix} F1 \cdot x_1 + F2 \cdot x_2 + F3 \cdot x_3 + F4 \cdot x_4 + F5 \cdot x_5 + F6 \cdot x_6 \\ \\ \\ \\ \\ \end{Bmatrix} = \begin{Bmatrix} \zeta \\ \\ \\ \\ \\ \end{Bmatrix}$$